

Premium Power From Premium Battery

# newmax<sup>®</sup>

## SG SERIES SOLAR GEL DEEP CYCLE

NEWMAX Solar gel batteries are true maintenance-free sealed batteries engineered specially to satisfy the need for frequent deep cycles from PVs and renewable energy storage applications. We are confident that our technology-intensive, long-lasting, and environment friendly SG batteries will provide stability and efficiency for your everyday renewable energy needs.



## General Features

◆ Plate	Paste type
◆ Battery type	Sealed and Maintenance free / Non-spillable construction design
◆ Case/cover mat	High-stiffness engineering PP plastic (Heat Deflection Temp. 140°C) RoHS Compliant EU Directive 2002/95/EC
◆ Safety performance	Safety valve & flame arrestor installation for explosion proof.
◆ High quality, high reliability and low self discharge rate	
◆ Exceptional deep discharge recovery performance	
◆ Flexibility design for multiple install positions (Position Free, GEL Technology)	
◆ Designed in accordance with and published in compliance with applicable IEC and BS EN, KS stds.	
<ul style="list-style-type: none"> <li>• IEC 60896-21/22 Stationary lead-acid batteries – Valve regulated types</li> <li>• BS EN 61427 Secondary cells and batteries for photovoltaic energy systems (PVES)</li> <li>• KS C 8518 Stationary sealed lead-acid batteries – Valve regulated types</li> </ul>	

## Technical Features



### Premium ActiveCarbon™

In every Newmax battery, proprietary micro carbon additive is used in the active material for both positive and negative plates to enhance charge acceptance and cycle endurance. ActiveCarbon™ works to strengthen charge pathways to improve performance consistency and enhance performance at partial state of charge (PSoC) environment.



### ThixoPure™ GEL Technology

Application of refined pure thixotropic colloidal silica GEL technology to battery electrolyte has greatly increased the cycle life by both preventing plate stratification and providing extra temperature protection against heat and cold. We are the first Korean company to successfully commercialize the GEL technology in the VRLA battery industry.



### Highly Resistive Heat Protection Case

Specially formulated heat and flame resistant polypropylene case material is used to effectively block ambient heat thus preventing heat related malfunctions such as thermal runaway. This proprietary high rigidity case material has heat deflection rating of 140°C and complies to RoHS Compliant EU Directive 2002/95/EC. Additional UL94-V0 protection option also available.



### MaxPress™ Grid Technology

Patent pending grid compressing technology which increases the density of the lead grain of the grids. The grain density is typically 400% greater than that of the conventional casting method. This up-to-date grid technology enables our batteries to survive even the toughest deep discharge and PSoC applications.




### FlexSealing™ Anti Explosion Filter

Patent pending proprietary cap filtering and sealing technology. Battery cell caps are sealed simultaneously using specially designed o-rings and explosion filters to prevent leakage and gassing more effectively than ever before.


## Operating temperature range

Discharge	Charge	Storage
-20°C ~ 60°C	0°C ~ 50°C	-20°C ~ 60°C


DOD% vs charging time curve (@25°C)

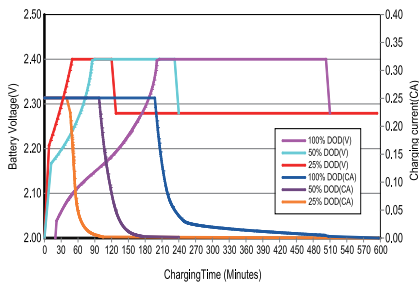


Cycle life vs detail DOD% (@25°C)

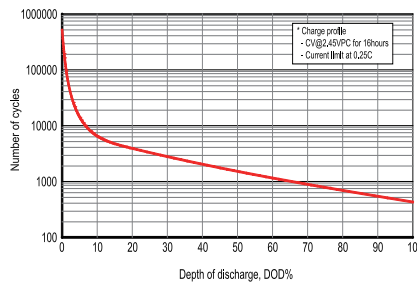


Solar charging characteristics (@25°C)

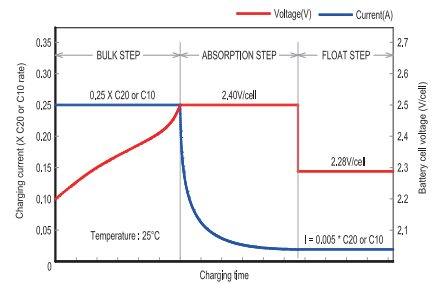


Relationship between cycle life & temp.

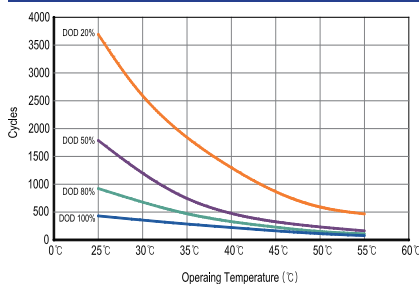


Cycle life characteristics (@25°C)

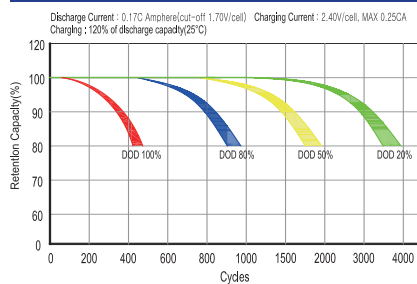


Relationship between charging voltage & temp.

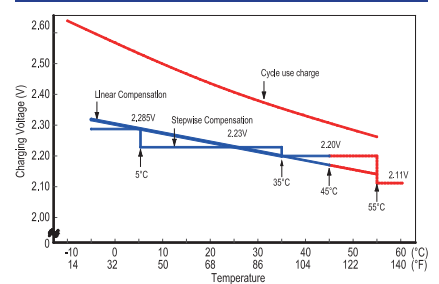


Effect of temperature on capacity

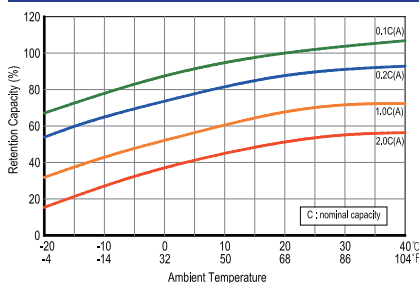

Self discharge

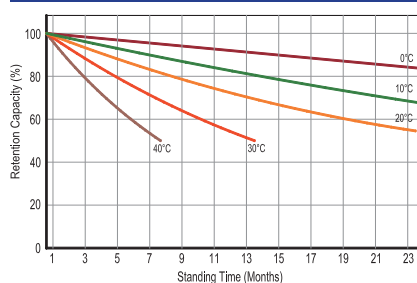


Relationship between Floating life & temp.

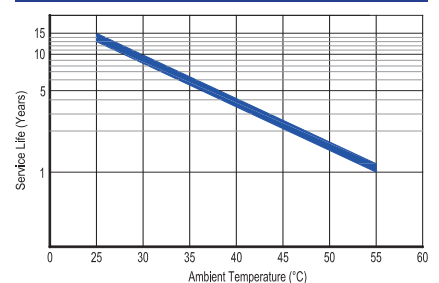


# SG 1500H

## (12V150AH/C20)



Standard

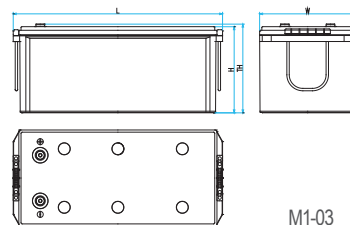

M1-03

Battery Model	SG 1500H (12V150AH / 20 HOUR RATE)					
	C <sub>20</sub> (1.80VPC)	C <sub>10</sub> (1.80VPC)	C <sub>5</sub> (1.70VPC)	C <sub>1</sub> (1.60VPC)		
Nominal Capacity (@25°C)	150Ah	130Ah	125Ah	90Ah		
Dimensions (mm/inch)	Length	Width	Height	Total Height		
	524(20.63)	242(8.52)	215(8.46)	222(8.74)		
Weight (kg/lbs)	43.3kg(95.46 lbs)±3%					
Internal resistance (mΩ)	≤3.08mΩ(25°C, 77°F), Full charged					
Max. discharge current (5 sec.)	1,040 A	Max. discharge current(continuous)		390 A		
Capacity affected by Temperature	@30°C(86°F)	@25°C(77°F)	@10°C(50°F)	@-10°C(14°F)		
	105%	103%	95%	78%		
Self-discharge (@25°C,77F)	After 1 month ≤2%		After 3 month ≤6%	After 6 month ≤12%		
Max. short duration discharge current (0.1sec)	2,600A±10%					
Recommended charging (@25°C) Solar system	1 <sup>st</sup> Bulk Step		2 <sup>nd</sup> Absorption Step		3 <sup>rd</sup> Floating Step	
	0.20~0.25C CC		2.40V/cell CV,(cut-off A : 0.005C)		2.28V/cellCV	

### Discharge ratings – Amperes @ 25°C

V/cell	Minutes						Hours						
	5	10	15	20	30	45	1	2	3	5	8	10	20
1.85V	250	197	163	139	125	92.6	74.1	44.2	31.5	22.7	14.6	11.9	6.89
1.80V	292	222	181	152	136	101	80.6	46.8	33.0	24.1	15.8	13.0	7.51
1.75V	331	251	202	168	147	107	83.9	48.1	33.7	24.8	16.1	13.2	7.52
1.70V	370	271	212	174	151	109	85.5	48.8	34.3	25.0	16.3	13.4	7.53
1.65V	407	283	219	179	155	111	87.1	49.3	34.9	25.3	16.6	13.5	7.56
1.60V	454	299	227	181	158	114	89.3	49.9	35.2	25.5	16.7	13.6	7.64

### Discharge ratings – Watts / Block @ 25°C

V/cell	Minutes						Hours						
	5	10	15	20	30	45	1	2	3	5	8	10	20
1.85V	2,820	2,289	1,921	1,651	1,525	1,148	929	534	380	272	177	144	83.3
1.80V	3,241	2,519	2,083	1,785	1,634	1,227	986	550	390	279	181	146	84.4
1.75V	3,608	2,756	2,255	1,900	1,708	1,267	1,015	572	401	287	184	149	84.3
1.70V	3,959	2,913	2,329	1,944	1,732	1,285	1,029	577	404	290	187	151	85.0
1.65V	4,244	3,056	2,403	1,991	1,765	1,309	1,046	583	410	293	189	154	86.0
1.60V	4,491	3,148	2,444	2,023	1,792	1,329	1,057	588	414	297	192	156	87.6



**KOREA BATTERY CO., LTD.**  
[www.newmaxbattery.co.kr](http://www.newmaxbattery.co.kr)

**Factory:** 134, 1Gongdan-Ro, Gumi-Si, Gyeongsangbuk-Do, Korea

**Office:** 3F Nambusunhwan-Ro 1684, Gangnam-Gu, Seoul Korea

Tel : +82-2-883-7091 Fax : +82-2-882-7094 Email : [contact@newmaxbattery.co.kr](mailto:contact@newmaxbattery.co.kr)